



WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

BRACKETS



STUD ROD & WASHER, BOLT & NUT



BEAM CLAMP, ANCHOR




PIPE TWIN & SPRINKLER ROSETTE



STEEL PIPES & FITTINGS



L BRACKET / CHANNEL CLIP

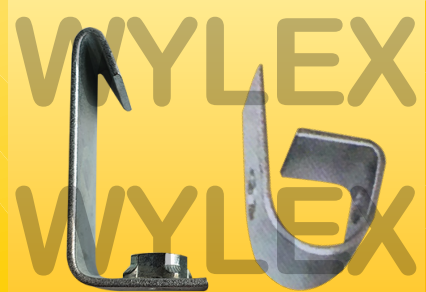


CONDUIT BRACKET / CONDUIT BRACKET WITH WING BOLT



U BOLT c/w Nut



TRUNKING BRACKET

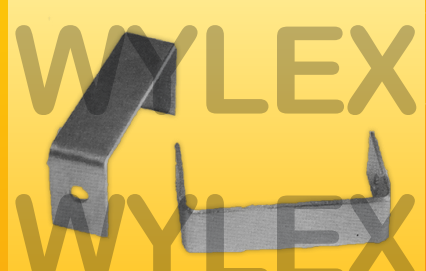


**U-Bolt C/W Nuts**


- Size Range** : 1/2" - 12"
Material : Mild Steel
Finishes : Hot-Dip Galvanized / Electro -zinc
Services : Recommended for suspension of non-insulated, stationary pipe lines.

L Bracket / Channel Clip

- Quick and easy installation on C or Z purlins
- Reliably designed to hand cable trays, pipes and etc
- Material : Flat Bar
- Coating : Zink Plated
- Available size : 1/4", 5/16", 3/8" & 1/2"

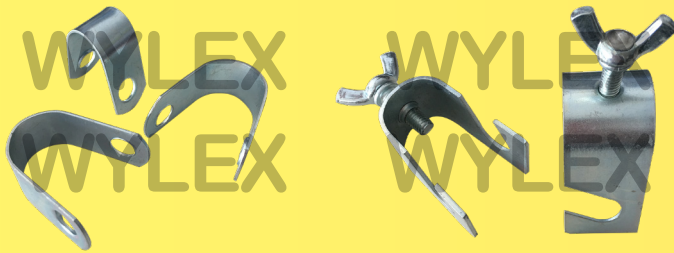Conduit Bracket / Conduit Bracket with Wing Bolt

- Size Range** : 20MM / 25MM
Material : Mild Steel
Finishes : Zinc Plate / Hot-Dip Galvanized
Features : Electrical & Aircond

Wedge Nut

- Size Range : 5/16", 3/8" / M10 / M12
- Fitted easily and securely by hand, no tools required
- Ideal for use with the Stud end fixing
- The Wedge Nut must be locked into place using a nut and washer, or similar locking method (if using a washer, the diameter must exceed that of the channel entrance in order to create a secure installation)
- Load ratings are dependent on the capacity of the concrete slab, which must be checked in accordance with the decking manufacturer's guidelines (overall responsibility lies with the installer)

Strut Clamp


- Size Range : 3/4" - 8"
- Suitable for Conduit Pipe and Gi Pipe to strut Channel apart design that includes Screw and Nut
- Fits into both 21MM and 41mm Strut Channel
- Finishes : Zinc plate / Hot-Dip Galvanised / SS304
- Services : enables for indoor & outdoor

Washer / Bolt / Nut

- Size Range** : 1/2" - 3/4"
Material : Mild Steel
Finishes : Hot-Dip Galvanized / Electro-zinc
Services : Recommended to provide strong bond between components under great amounts of pressure



Pipe Ring Type A



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated, stationary pipe lines.
Maximum Temperature	: 650 °F
Complies with	: Federal Specification WW-H-171E (Type 10) and Manufacturers. Standardization Society SP-69 (Type 10)
Features	: - Permits installation before or after pipe is in place. - Provides economical installation.
Ordering	: Specify pipe size, figure number, name.

Pipe Ring Type B



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated, stationary pipe lines.
Maximum Temperature	: 450 °F
Complies with	: Federal Specification WW-H-171E (Type 25) and Manufacturers. Standardization Society SP-69 (Type 12)
Features	: - Rapid installation assured by hinged design and single closure screw. - When used with nipple, this clamp is particularly adaptive for use on refrigeration or compressor piping subject to vibration. - Interior design provides firm grip on pipe. - Inside of ring tapered to prevent entrapment of condensed moisture.
Ordering	: Specify pipe size, figure number, name.

Pipe Ring Type C



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated pipe lines or conduits.
Maximum Temperature	: 450 °F
Complies with	: Federal Specification WW-H-171E (Type 11) and Manufacturers. Standardization Society SP-69 (Type 11)
Features	: - Permits installation before or after pipe is in place. - Provides economical installation.
Ordering	: Specify pipe size, figure number, name.

Pipe Ring Type D



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of cold pipe lines or hot lines where little or no insulation is required.
Maximum Temperature	: 750 °F
Complies with	: Federal Specification WW-H-171E (Type 4) and Manufacturers. Standardization Society SP-69 (Type 4)
Installation	: Normally used with bolt and nut or hanger rod.
Features	: - Load rating meet ANSI code requirements and are substantiated by laboratory test. - Clamps tightly to pipe. - Wide range of sizes.
Ordering	: Specify pipe size, figure number, name.

Pipe Ring Type E



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: 650 °F
Maximum Temperature	: Federal Specification WW-H-171E (Type 26) and Manufacturers.
Complies with	: Standardization Society SP-69 (Type 26).
Ordering	: Specify pipe size, figure number, name.

Adjustable Clevis Hanger



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated, stationary pipe lines.
Maximum Temperature	: 650 °F
Complies with	: Federal Specification WW-H-171E (Type 1) and SP-69 (Type 1)
Installation	: Hanger load nut above clevis must be tightened securely to assure proper hanger performance.
Adjustment	: Vertical adjustment without removing pipe may be made from 1 1/8" to 5". Varying with the size of clevis. Tighten upper nut after adjustment.
Features	: - Design has yoke on outside of lower U-strap so yoke cannot slide toward centre of bolt is minimized. - Sizes 2 1/2" and up have rod and two nuts instead of bolt and nut, thread length on clevis rod is such that the threads locks the nuts in place and threads are not in shear place.
Ordering	: Specify pipe size, figure number, name.



WYLEX ENTERPRISE SDN. BHD. (1134841-P)

Tel : 03-8060 1723

H/P : 019-337 8520

E-mail : wylexyap28@gmail.com

Website : www.wylex.com.my

Pipe Ring Type A with Rubber




Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated, stationary pipe lines.
Maximum Temperature	: 650 °F
Complies with	: Federal Specification WW-H-171E (Type 10) and Manufacturers. Standardization Society SP-69 (Type 10)
Features	: - Permits installation before or after pipe is in place. - Provides economical installation.
Ordering	: Specify pipe size, figure number, name.

Pipe Ring Type B with Rubber



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated, stationary pipe lines.
Maximum Temperature	: 450 °F
Complies with	: Federal Specification WW-H-171E (Type 25) and Manufacturers. Standardization Society SP-69 (Type 12)
Features	: - Rapid installation assured by hinged design and single closure screw. - When used with nipple, this clamp is particularly adaptive for use on refrigeration or compressor piping subject to vibration. - Interior design provides firm grip on pipe. - Inside of ring tapered to prevent entrapment of condensed moisture.
Ordering	: Specify pipe size, figure number, name.

Strut Clamp with Rubber



Pipe Ring Type D with Rubber



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of cold pipe lines or hot lines where little or no insulation is required.
Maximum Temperature	: 750 °F
Complies with	: Federal Specification WW-H-171E (Type 4) and Manufacturers. Standardization Society SP-69 (Type 4)
Installation	: Normally used with bolt and nut or hanger rod.
Features	: - Load rating meet ANSI code requirements and are substantiated by laboratory test. - Clamps tightly to pipe. - Wide range of sizes.
Ordering	: Specify pipe size, figure number, name.

Pipe Ring Type E with Rubber



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: 650 °F
Maximum Temperature	: Federal Specification WW-H-171E (Type 26) and Manufacturers.
Complies with	: Standardization Society SP-69 (Type 26).
Ordering	: Specify pipe size, figure number, name.

Adjustable Clevis Hanger with Rubber



Size Range	: 3/4" - 12"
Material	: Mild Steel
Finish	: Hot-Dip Galvanized / Zinc Plate
Service	: Recommended for suspension of non-insulated, stationary pipe lines.
Maximum Temperature	: 650 °F
Complies with	: Federal Specification WW-H-171E (Type 1) and SP-69 (Type 1)
Installation	: Hanger load nut above clevis must be tightened securely to assure proper hanger performance.
Adjustment	: Vertical adjustment without removing pipe may be made from 1 1/8" to 5". Varying with the size of clevis. Tighten upper nut after adjustment.
Features	: - Design has yoke on outside of lower U-strap so yoke cannot slide toward centre of bolt is minimized. - Sizes 2 1/2" and up have rod and two nuts instead of bolt and nut, thread length on clevis rod is such that the threads locks the nuts in place and threads are not in shear place.
Ordering	: Specify pipe size, figure number, name.



WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

Heavy Duty / Beam Clamp



- Swivel type fixing
- Fix against the side of a steel beam
- Finish : Hot-Dipped Galvanized

A (mm)	Finish
< 24	EG
< 24	HDG

Beam Clamp Tiger c/w Tiger Clip



- Safe to use : Quick and easy installation
- Enable clamping to steel structures up to 36mm thick.
- Various versions to cater to different usages.
- Finish : Hot-Dipped Galvanized

Purlin Hanger



- Purlin Hanger safely allows you to fasten onto the roofing purlins from the ground or services level. Working at high levels involves expensive & approved scaffoldings and to move the scaffold at site conditions isn't an easy job too.
- The purlin hanger comes complete with either a M10 or M12 rod bracket to relief the bending stress from the threaded rod when hanging down perpendicularly. This will sit the gradient of the purlins from the roofing structure.
- The purlin hanger are available in Hot-Dipped Galvanized to suit enclosed and ventilated buildings.

Stainless Steel Conduit Clip



- Spring steel
- Conduit / pipe hanger from flange, wire or plain rod
- No installation tools required

Stud Rod



- Diameter : 6mm, 8mm, 10mm, 12mm, 16mm, 3/8", 1/2", 5/8", 3/4", 5/16"
- Material : Mild Steel
- Finishes : Hot-Dipped Galvanized
- Services : Recommended for suspension of non-insulated, stationary pipe lines.



WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my


Heavy Duty Beam Clamp

- Swivel type fixing
- Fix against the side of a steel beam
- Finish: Electro-zinc plated or Hot dip galvanised (HDG)

A (mm)	Finish
< 24	ZP
< 24	HDG



Without Hanger



With Hanger

Beam Clamp (Tiger)



9-14MM
Flange Thickness
Max. 14mm




9-22MM
Flange Thickness
Max. 22mm



9-33MM
Flange Thickness
Max. 33mm



- Safe to use : Quick and easy installation.
- Enable clamping to steel structures up to 36mm thick.
- Various versions to cater to different usages.




Cut Point Bolt

MG

RP

Beam Clamp (Tiger) C/W Tiger Clip

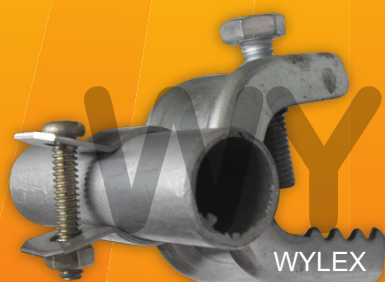


Fits into all sizes of Beam Clamp, either side or bottom mount or both.

Part No.	D
3/4"	19mm
1"	25mm
1.1/4"	32mm

Beam Clamp (TIGER)

WL Thread Insert

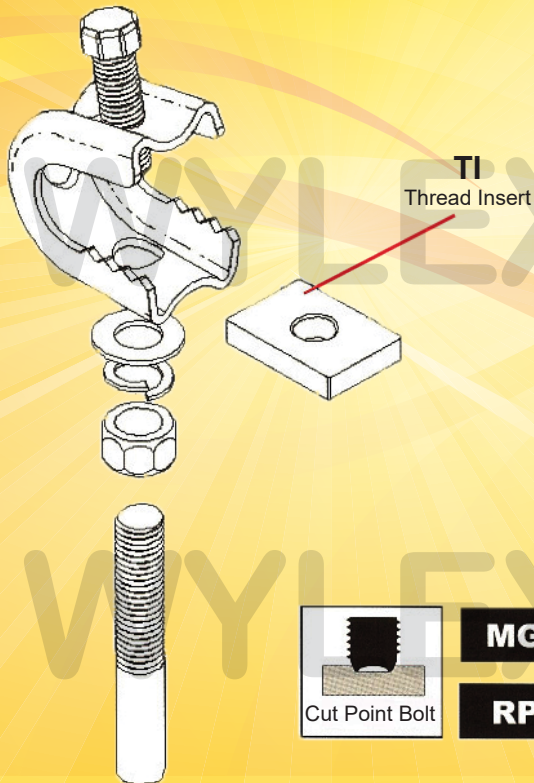

The thread insert is another flexible feature of the WL series of beam clamps and accessories.



With 2 clamps to trapeeze your support system, you can achieve a max. static carrying load of 90kgs.




You can safely hang pipes that are within it's safe allowable carrying load of 45kgs. per clamp after taking into account of safety factor (1:5).



Mounting electrical fittings onto steel structures are made easy without drilling or welding. Even easier when you need to relocate the fittings.

Beam Clamp (TIGER) c/w Tiger Clip

WL conduit clips allows you to hold up to 1 1/2" EMT conduit.

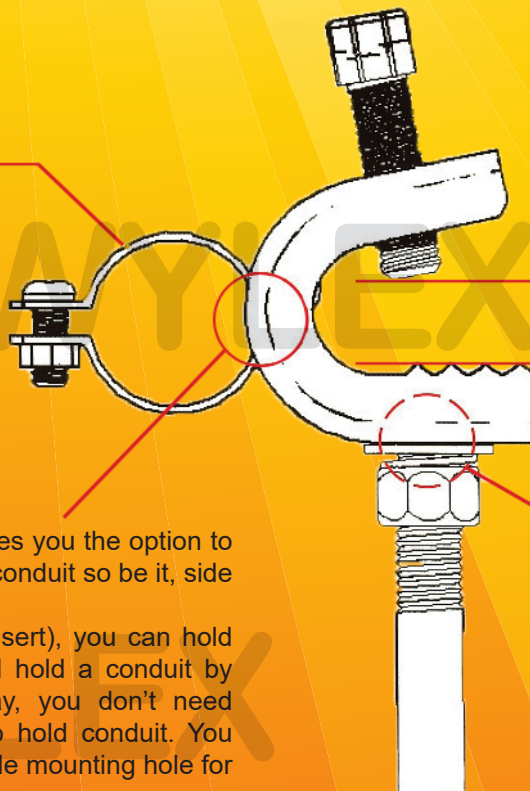

WL Beam Clamps caters to range of up to 33mm flange thickness.

WL Beam Clamps gives you the option to locate the position of conduit so be it, side or bottom mount.

With the TI (thread insert), you can hold threaded rod and still hold a conduit by side mount. This way, you don't need another clamp just to hold conduit. You can even leave the side mounting hole for future use.

Bottom mounting hole gives you the option for either holding threaded rod or conduit.



WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

MECHANIC TOOLS

Socket



Extension Bar
Adaptor



Ratchet Handle
Torque Wrench



T-Handle
Flex Handle
L-Handle



Socket Set



Bit Socket



Lug Nut Remover, Screw Extractor Set,
Hex Cap Screw Spoiler



Tool Box




Cabinet




Tray, Pick Up Tool, Oil Funnel



Puller,
Caliper Wind Back Kit

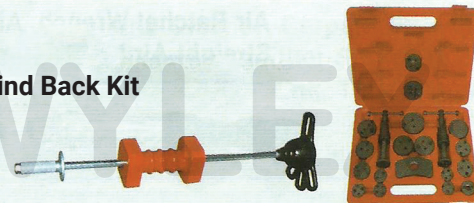

Pry Bar Set, Tire Lever
Valve Stem Seal Ring Pliers (CRV)

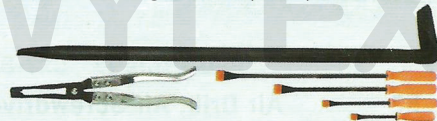

Grease Gun,
Oil Filter Wrench,
Oil Filter Plier



Torch Light



Hot Glue Gun, Soldering Gun




RINGGING

Chain Hoist



Master Link, Hook, Pulley Block

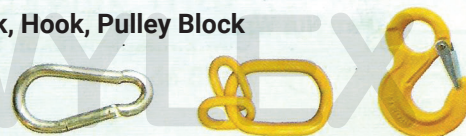

Wire Rope Clip, D-Shackle, Turnbuckle





WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

PNEUMATIC TOOLS

Air Ratchet Wrench, Air Grinder,
Straight Air Needle Scaler




Impact Wrench



Air Drill, Air Screwdriver




Air Hydraulic Riveter,
Palm Sander, Air Saw

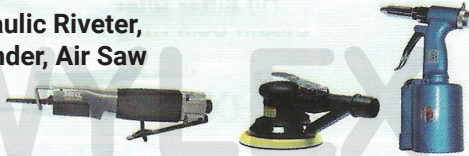

Quick Coupler



Inflator, Air Regulator,
Air Blow Gun Brass Inlet

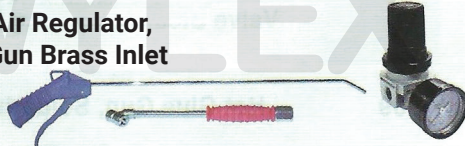


FASTENING WRENCHES

Combination Wrench



Double Ring Wrench
Flare Nut Wrench
Socket Wrench
Torx Wrench



Combination Wrench Set



Hammer Wrench



Magnetic Hex Wrench




Driver Bit



Hex Bit Socket



Screwdriver Set




Screwdriver



Spanner, Pipe Wrench



Hose Clip, Cable Tie



HOLDING TOOLS

Plier Series



Cable Cutter



Locking Plier



Pump Plier, Tinman Snip,
Steel Band Cutter



Aviation Snip, Caulking Gun
Mini Bolt Cutter



Bolt Cutter, Hedge Shear



Pruning Shear
Thinning Shear
Scissor





WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

ABRASIVE TOOLS

Mounted Flap Wheel



Cutting Wheel,
Flap Disc



Hole Cutter



M2 Jobber Drills



HSS Hex Auger Bit
Hole Saw



Steel Brush



Metric Thread Hand Tap



OTHER TOOLS

Magnetic Drilling Machines




Safety Shoe



DOUBLE SIDED HEAVY DUTY LADDER




Safety PVC Side Cover



Extra Steel bar for
extra loading (Optional)



Heavy duty siderail for
exceptional load rating



Hollow profile for
better stability

- ✓ Available in 4 to 20 steps
- ✓ Heavy duty siderails for exceptional load rating
- ✓ Wide non-slip step provide comfort and stability
- ✓ Attractively powder coated
- ✓ Hollow profile for better stability
- ✓ Extra steel bar for extra loading (Optional)





WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

HOLDING TOOLS

Gear Puller, Battery Clamp,
Bearing Puller



Insulated Ratchet Crimping Plier,
Auto Wire Stripper, Bench Vise



Staple



Hand Riveter, G-Clamp, F-Clamp



Pipe Cutter, Tubing Cutter



Toggle Clamp



Hand Cleaner, Carpenter Pencil,
Silicone Gap Filler Scrapper,
Paint Mixer Shank, Tape Dispenser



Paint Brush, Cleaning Cloth



Paint Roller



Measure Tape, Ruler



Box Level



Measuring Wheel,
Thickness Filler Gauge



Scraper
Plastering Trowel



CUTTING TOOLS

Cutter



Pruning Saw, Bow Saw, Hacksaw,
Glass Oil Cutter



Circular Saw
Diamond Cutter



LAYOUT & FINISHING TOOLS

Punches



STRIKING & STRUCK TOOLS

Hammer



Chisel, Pin Punch



ABRASIVE TOOLS

Carbide Burrs



Abrasive Paper, Tapered File,
Sharpening Stone

