



# WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama, 47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

## Heavy Duty / Beam Clamp



- Swivel type fixing
- Fix against the side of a steel beam
- Finish : Hot-Dipped Galvanized

A (mm)	Finish
< 24	EG
< 24	HDG

## Beam Clamp Tiger c/w Tiger Clip



- Safe to use : Quick and easy installation
- Enable clamping to steel structures up to 36mm thick.
- Various versions to cater to different usages.
- Finish : Hot-Dipped Galvanized

## Purlin Hanger




- Purlin Hanger safely allows you to fasten onto the roofing purlins from the ground or services level. Working at high levels involves expensive & approved scaffoldings and to move the scaffold at site conditions isn't an easy job too.
- The purlin hanger comes complete with either a M10 or M12 rod bracket to relief the bending stress from the threaded rod when hanging down perpendicularly. This will sit the gradient of the purlins from the roofing structure.
- The purlin hanger are available in Hot-Dipped Galvanized to suit enclosed and ventilated buildings.

## Stainless Steel Conduit Clip



- Spring steel
- Conduit / pipe hanger from flange, wire or plain rod
- No installation tools required

## Stud Rod

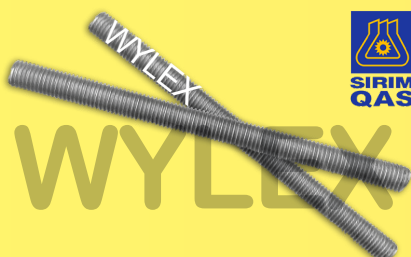

- Diameter : 6mm, 8mm, 10mm, 12mm, 16mm, 3/8", 1/2", 5/8", 3/4", 5/16"
- Material : Mild Steel
- Finishes : Hot-Dipped Galvanized
- Services : Recommended for suspension of non-insulated, stationary pipe lines.



# WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama, 47100 Puchong, Selangor Darul Ehsan.


Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexyap28@gmail.com Website : www.wylex.com.my

## Heavy Duty Beam Clamp

- Swivel type fixing
- Fix against the side of a steel beam
- Finish: Electro-zinc plated or Hot dip galvanised (HDG)

A (mm)	Finish
< 24	ZP
< 24	HDG

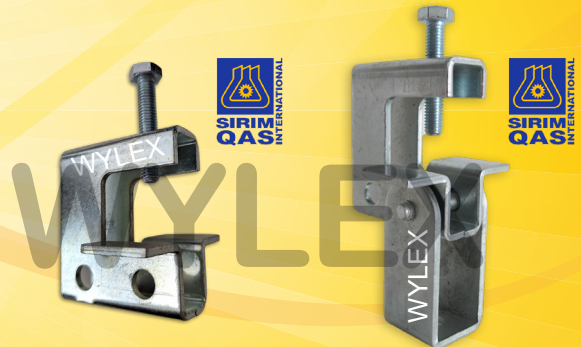

Without Hanger

With Hanger

## Beam Clamp (Tiger)



**9-14MM**

Flange Thickness  
Max. 14mm



**9-22MM**


Flange Thickness  
Max. 22mm



**9-33MM**

Flange Thickness  
Max. 33mm

- Safe to use : Quick and easy installation.
- Enable clamping to steel structures up to 36mm thick.
- Various versions to cater to different usages.




Cut Point Bolt

**MG**

**RP**

## Beam Clamp (Tiger) C/W Tiger Clip

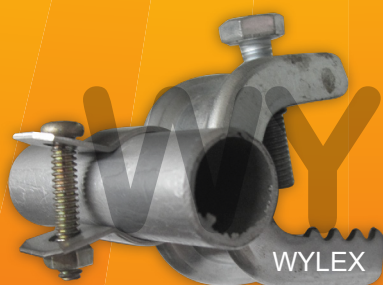

Fits into all sizes of Beam Clamp, either side or bottom mount or both.

Part No.	D
3/4"	19mm
1"	25mm
1.1/4"	32mm